

Montageanleitung

1 **Lieferumfang:** J80026A0000




2 **Lieferumfang:** J80026A0001





max. Ø7,3

Separat bestellen

- H86011A0001 grau
- H86011A0002 orange
- H86011A0003 blau
- H86011A0004 gelb
- H86011A0005 grün
- H86011A0006 schwarz
- H86011A0000 weiß


3

Abisolierlänge min. 40 mm

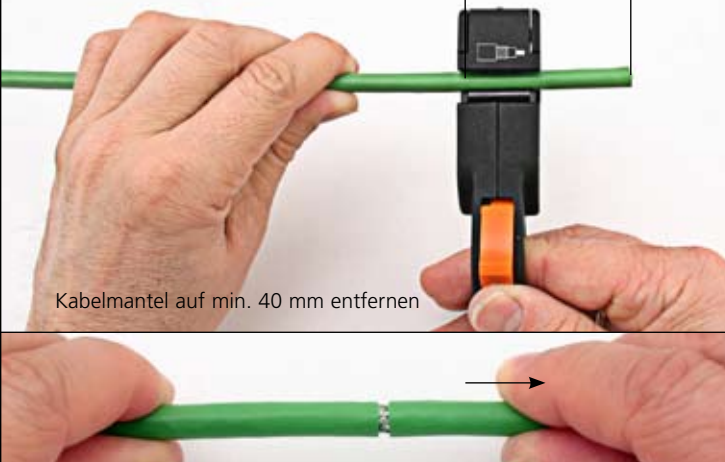


Kabelmantel auf min. 40 mm entfernen

4a **SF/UTP** Schirmgeflecht über den Mantel zurücklegen

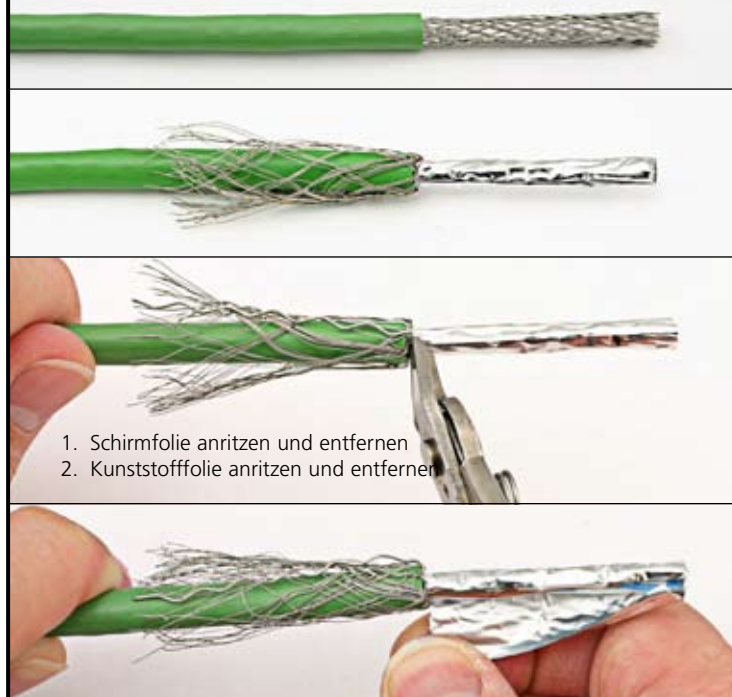

1. Schirmfolie anritzen und entfernen
2. Kunststoffolie anritzen und entfernen

4b **SF/UTP** Schleppkettenkabel

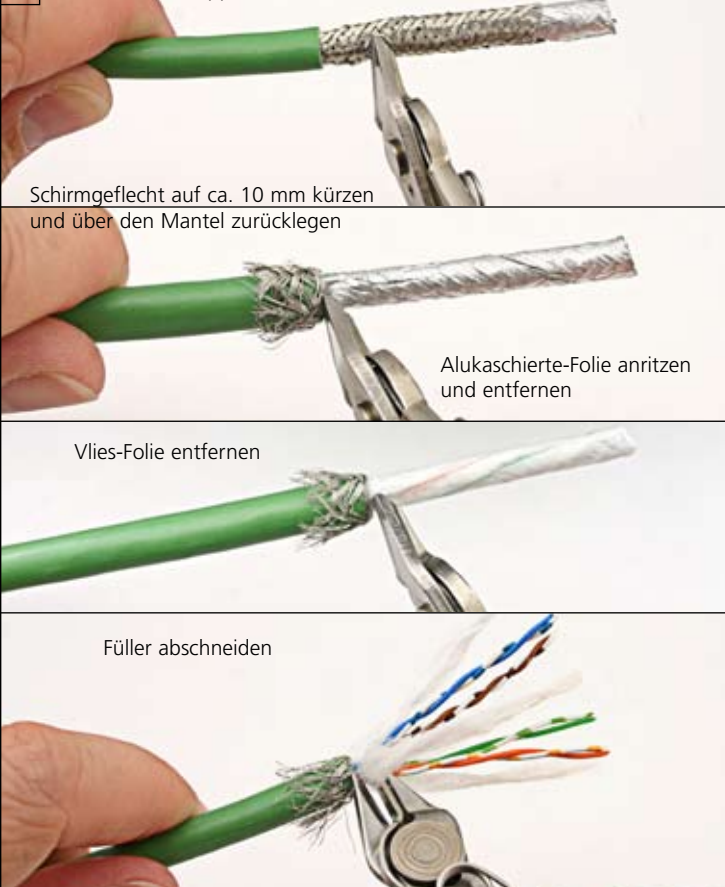

Schirmgeflecht auf ca. 10 mm kürzen und über den Mantel zurücklegen

Alukaschierte-Folie anritzen und entfernen

Vlies-Folie entfernen

Füller abschneiden

4c **S/FTP** Schirmgeflecht über den Mantel zurücklegen









Paarabschirmung anritzen und entfernen



Anschlussbelegung				
RJ45 PIN Nr.	Farbcode T568		DIN 47100	Industrie
	A	B		
1	WH-GN	WH-OG	WH	YE
2	GN	OG	BN	OG
3	WH-OG	WH-GN	GN	WH
4	BU	BU	YE	-
5	WH-BU	WH-BU	GY	-
6	OG	GN	PK	BU
7	WH-BN	WH-BN	BU	-
8	BN	BN	RD	-

Verbindung	
1:1	1GBT gekreuzt
1-1	1-3
2-2	2-6
3-3	3-1
4-4	4-7
5-5	5-8
6-6	6-2
7-7	7-4
8-8	8-5

Anwendung							
RJ45 PIN Nr.	10BT/ 100BT	Gigabit Ethernet	Token Ring ISDN/So	TP-PMD/ ATM	ISDN/ So	Upo/ TEL	
1	•	•		•			
2	•			•			
3	•	•	•		2a		
4		•	•		1a	•	
5		•	•		1b	•	
6	•	•	•		2b		
7		•		•			
8		•		•			

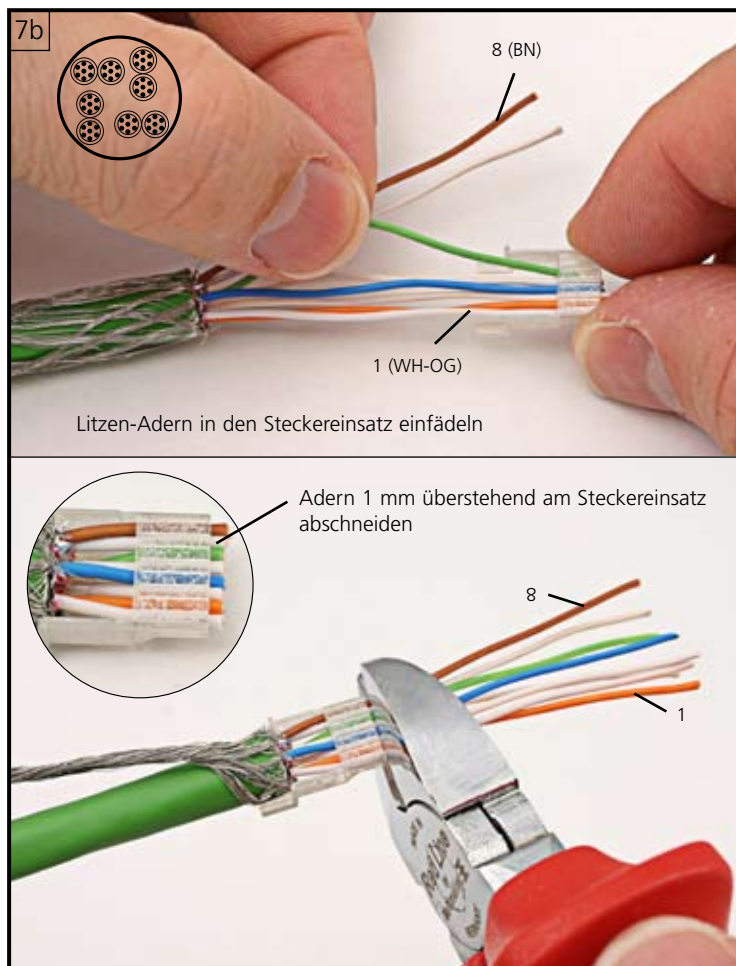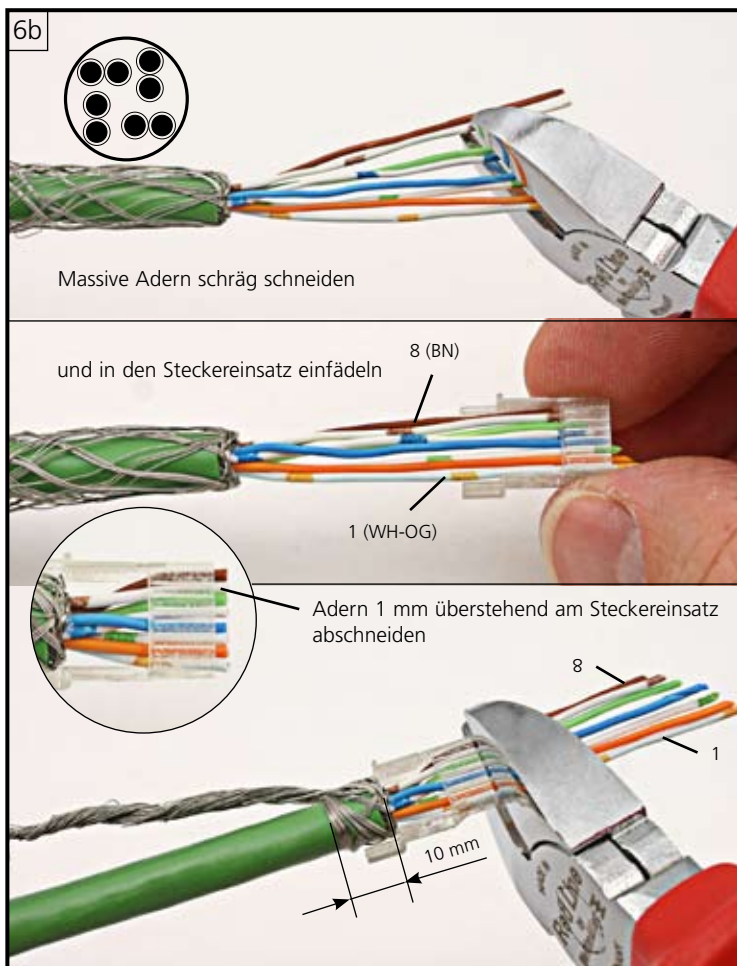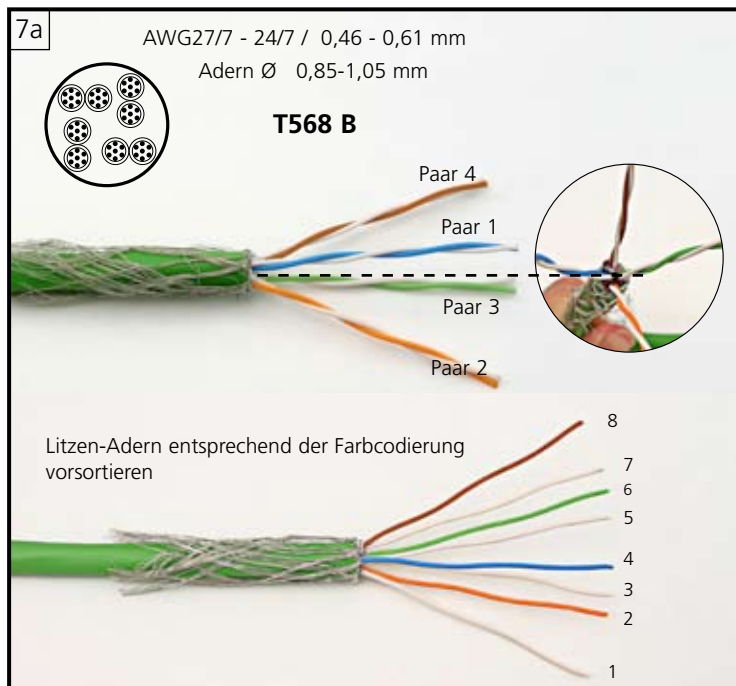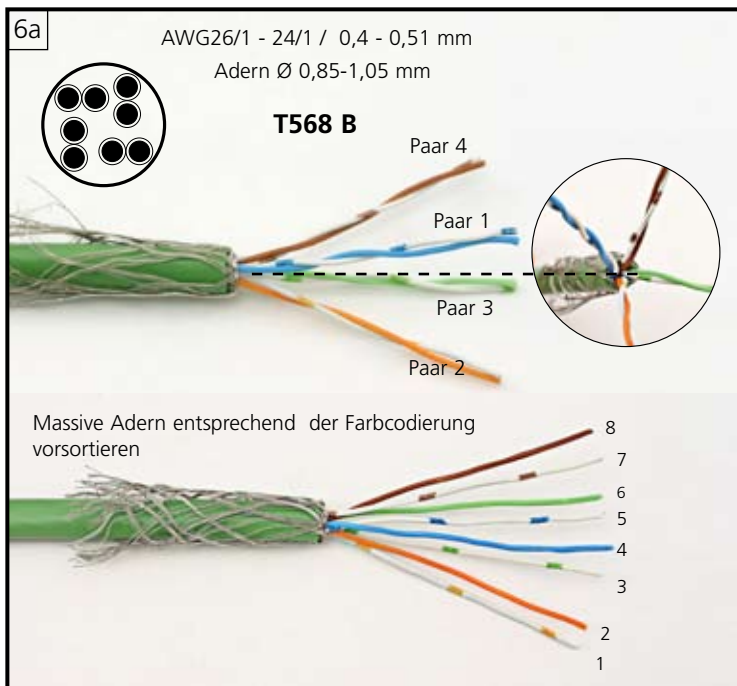

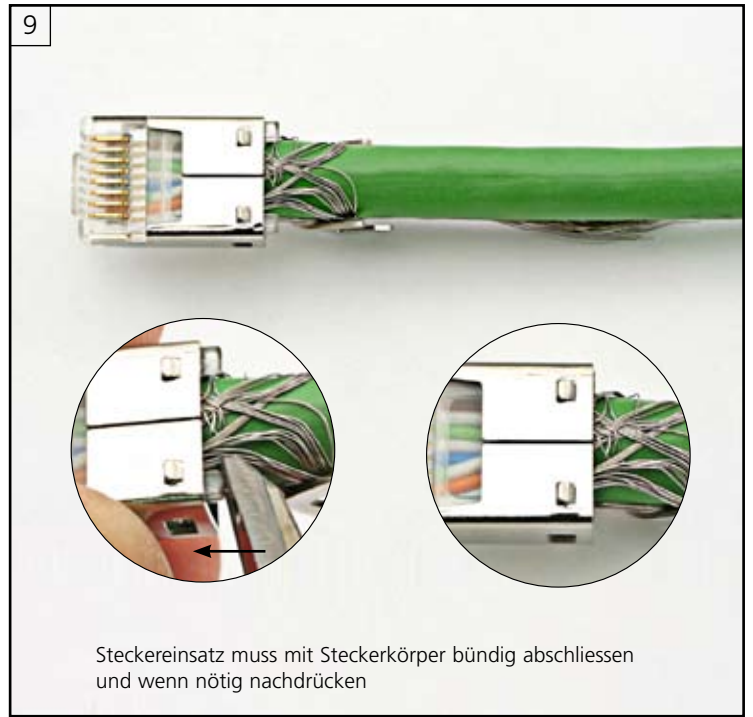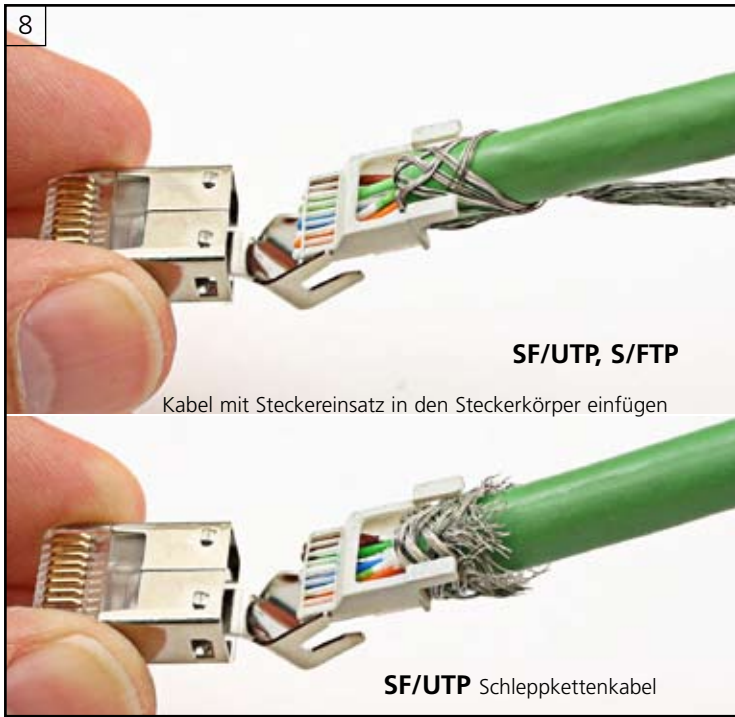

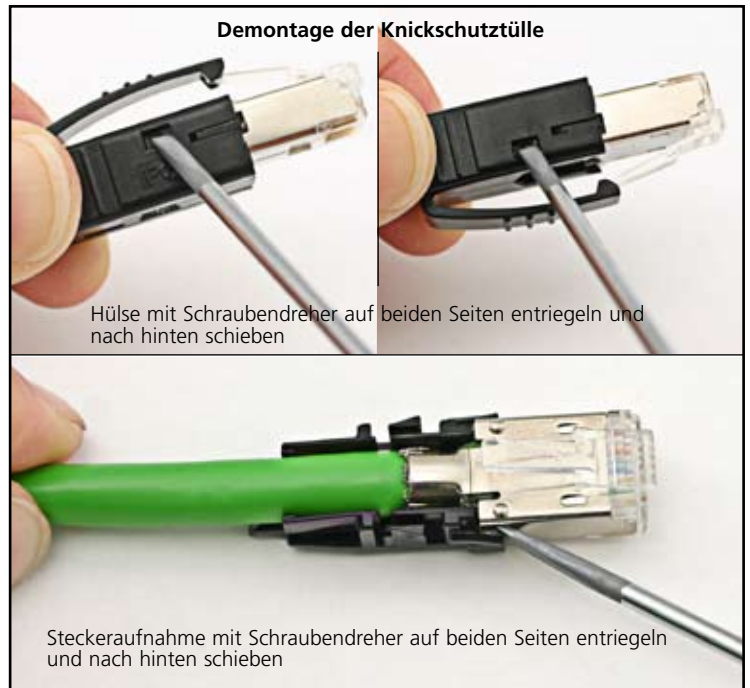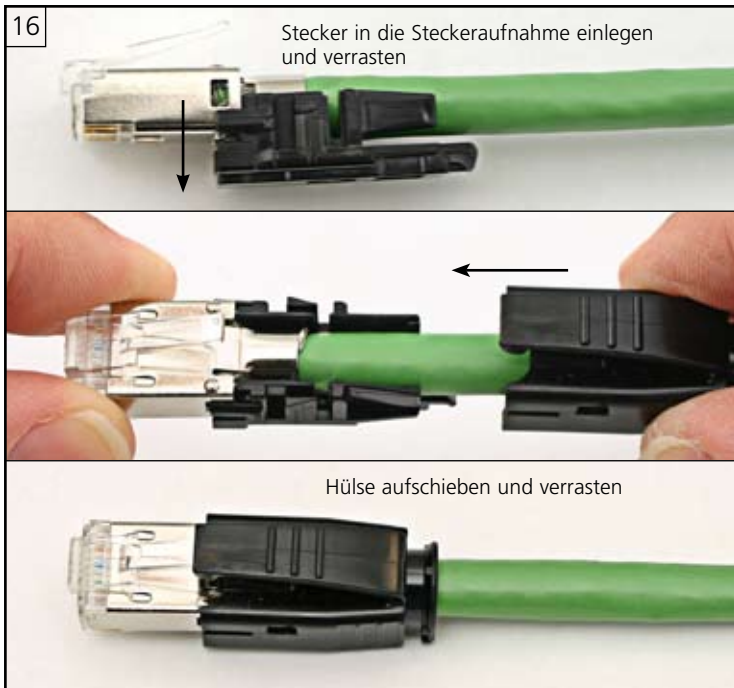

1 **Scope of delivery:** J80026A0000




2 **Scope of delivery:** J80026A0001





order separately


- H86011A0001 grey
- H86011A0002 orange
- H86011A0003 blue
- H86011A0004 yellow
- H86011A0005 green
- H86011A0006 black
- H86011A0000 white

3




Stripping length min. 40 mm
min. 1.6 in.




remove the cable jacket to approx. 40 mm (1.6 in.)




4a **SF/UTP** slide braided shield over the cable jacket


1. score and remove the foil screen
2. score and remove the synthetic foil




4b **SF/UTP** Drag chain cable




cut off braided shield to approx. 10 mm (0.4 in.) and slide it over the cable jacket



score and remove the aluminum laminated foil






remove the vylene foil



cut off the filler

4c **S/FTP** slide braided shield over cable jacket

score and remove the pair screen

PIN assignments				
RJ45 PIN No.	Colour code T568		DIN 47100	Industrial
	A	B		
1	WH-GN	WH-OG	WH	YE
2	GN	OG	BN	OG
3	WH-OG	WH-GN	GN	WH
4	BU	BU	YE	-
5	WH-BU	WH-BU	GY	-
6	OG	GN	PK	BU
7	WH-BN	WH-BN	BU	-
8	BN	BN	RD	-

Connection	
1:1	1GBT crossover
1-1	1-3
2-2	2-6
3-3	3-1
4-4	4-7
5-5	5-8
6-6	6-2
7-7	7-4
8-8	8-5

Application							
RJ45 PIN No.	10BT/100BT	Gigabit Ethernet	Token Ring ISDN/So	TP-PMD/ATM	ISDN/So	Upo/TEL	
1	•	•		•			
2	•	•		•			
3	•	•	•		2a		
4		•	•		1a	•	
5		•	•		1b	•	
6	•	•	•		2b		
7		•		•			
8		•		•			

